


Product Information

VESTAMID® Care ML-GB30**MICROGLASS BEAD-FILLED (30%) PA12 RESIN FOR THE INJECTION MOULDING OF RIGID, LOW-WARPAGE AND DIMENSIONALLY ACCURATE MOULDINGS****Biocompatibility of VESTAMID® Care ME**

Biocompatibility was tested following ISO10993-1 recommendations for a surface medical device with up to 30 days body contact.

The material fulfills the requirements of USP<88> class VI.

Tests were performed by independent, certified laboratories.

Biocompatibility tests for VESTAMID® Care:

Standard	Description
ASTM F756-08	Hemocompatibility
ISO 10993-5	Cytotoxicity
ISO 10993-10	Sensitization: Maximization test according to Magnusson and Kligman
ISO 10993-10	Irritation: Intracutaneous Reactivity
ISO 10993-11	Acute Systemic Toxicity
USP Class VI	Acute Systemic Toxicity Intracutaneous Reactivity Muscle Implantation

Processing of VESTAMID® Care

For information about processing of VESTAMID®, please follow the general commendations about "[Processing of VESTAMID® compounds](#)".

The values presented are typical or average values, they do not constitute a specification.

FOR FURTHER INFORMATION PLEASE CONTACT US AT EVONIK-HP@EVONIK.COM
OR VISIT OUR PRODUCT AT WWW.EVONIK.COM/MEDICAL-TECHNOLOGY

Key Features**Industrial Sector**

Sustainable, Industry and Engineering, Medical Devices

Delivery form

Pellets, Granules

Sustainability

Sustainable electricity

Conformity

Biocompatibility, Medical application

Processing
Injection molding

Additives
Glass beads / spheres

LCA-values	dry	Unit	Test Standard
LCA name of certificate	VESTAMID® L GF medium	-	ISO 14040, 14044
LCA certifier	TÜV Rheinland	-	ISO 14040, 14044
Blue water consumption	23.6	kg	ISO 14040, 14044
Global Warming Potential incl. bio. C incl. LUC	5.1	kg CO ₂ eq./kg	ISO 14040, 14044
Global Warming Potential excl. bio. C incl. LUC	5.1	kg CO ₂ eq./kg	ISO 14040, 14044
Land use (ReCiPe 2016)	0.1	Annual crop eq. y	ISO 14040, 14044
GWP savings as compared to 2023 reference	-2.3	kg CO ₂ eq./kg	ISO 14040, 14044

Mechanical properties ISO	dry / cond	Unit	Test Standard
Tensile modulus	2100 / 1800	MPa	ISO 527
Tensile strength	47 / -	MPa	ISO 527
Yield stress	47 / 37	MPa	ISO 527
Yield strain	5 / 5	%	ISO 527
Stress at break	37 / *	MPa	ISO 527
Nominal strain at break, tB	20 / >50	%	ISO 527
Tensile creep modulus, 0,5% Strain, 1h	* / 1600	MPa	ISO 899-1
Tensile creep modulus, 0,5% Strain, 1000h	* / 1100	MPa	ISO 899-1
Charpy impact strength, +23°C	160 / N	kJ/m ²	ISO 179/1eU
Type of failure	C / -	-	-
Charpy impact strength, -30°C	160 / N	kJ/m ²	ISO 179/1eU
Type of failure	C / -	-	-
Charpy notched impact strength, +23°C	4.4 / 6	kJ/m ²	ISO 179/1eA
Type of failure	C / C	-	-
Charpy notched impact strength, -30°C	6 / 6	kJ/m ²	ISO 179/1eA

Type of failure

C / C

-

-

Thermal properties

dry / cond

Unit

Test Standard

Melting temperature

178 / *

°C

ISO 11357-1/-3

Temp. of deflection under load A, 1.80 MPa

55 / *

°C

ISO 75-1/-2

Temp. of deflection under load B, 0.45 MPa

150 / *

°C

ISO 75-1/-2

Vicat softening temperature B, 50 N, 50 K/h

155 / *

°C

ISO 306

Coeff. of linear therm. expansion, 23°C to 55 °C, parallel

130 / *

E-6/K

ISO 11359-1/-2

Coeff. of linear therm. expansion, 23°C to 55 °C, normal

130 / *

E-6/K

ISO 11359-1/-2

Melting Temperature

178

°C

ASTM D 3418

Physical properties

dry / cond

Unit

Test Standard

Density

1250 / 1260

kg/m³

ISO 1183

Water absorption

1.1 / *

%

Sim. to ISO 62

Humidity absorption

0.5 / *

%

Sim. to ISO 62

Density

1250

kg/m³

ASTM D 792

Burning Behav.

dry / cond

Unit

Test Standard

Burning behav. at 1.5 mm nom. thickn.

HB / *

class

IEC 60695-11-10

Thickness tested

1.6 / *

mm

-

Burnin behav. at thickness h

HB / *

class

IEC 60695-11-10

Thickness tested

3.2 / *

mm

-

Electrical properties

dry / cond

Unit

Test Standard

Volume resistivity, V

>1E13 / 2E12

Ohm*m

IEC 62631-3-1

Surface resistivity, E

* / 1E15

Ohm

IEC 62631-3-2

Relative permittivity, 100Hz

4.1 / 5

-

IEC 62631-2-1

Relative permittivity, 1MHz

3.5 / 4

-

IEC 62631-2-1

Dissipation factor, 100Hz

310 / 600

E-4

IEC 62631-2-1


Dissipation factor, 1MHz	230 / 370	E-4	IEC 62631-2-1
Dielectric strength, AC, S20/S20, t. 1 mm	- / 36	kV/mm	IEC 60243-1
Dielectric strength, AC, S20/P50	31 / -	kV/mm	Sim. to IEC 60243-1
CTI, test solution A, 50 drops value	600 / 600	-	IEC 60112
Assessment of the insulation group	I	-	DIN EN 60664-1

Rheological properties	dry / cond	Unit	Test Standard
Melt volume-flow rate, MVR	100 / *	cm ³ /10min	ISO 1133
Temperature	275 / *	°C	-
Load	5 / *	kg	-
Molding shrinkage, parallel	0.6 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / *	%	ISO 294-4, 2577
Mold temperature	80 / *	°C	-
Melt temperature	250 / *	°C	-


Test specimen production	dry	Unit	Test Standard
Injection Molding, melt temperature	250	°C	ISO 294
Injection Molding, mold temperature	80	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294
Injection Molding, pressure at hold	70	MPa	ISO 294

Diagrams


Viscosity-shear rate HKR

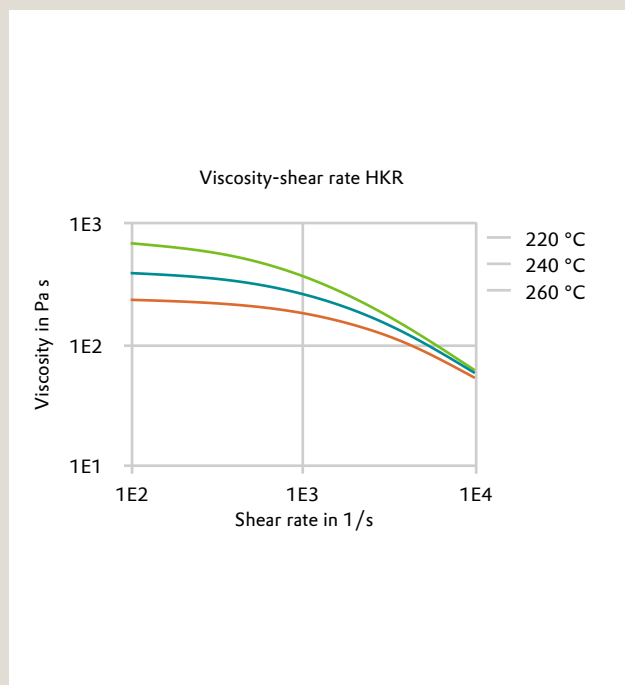


Shearstress-shear rate HKR

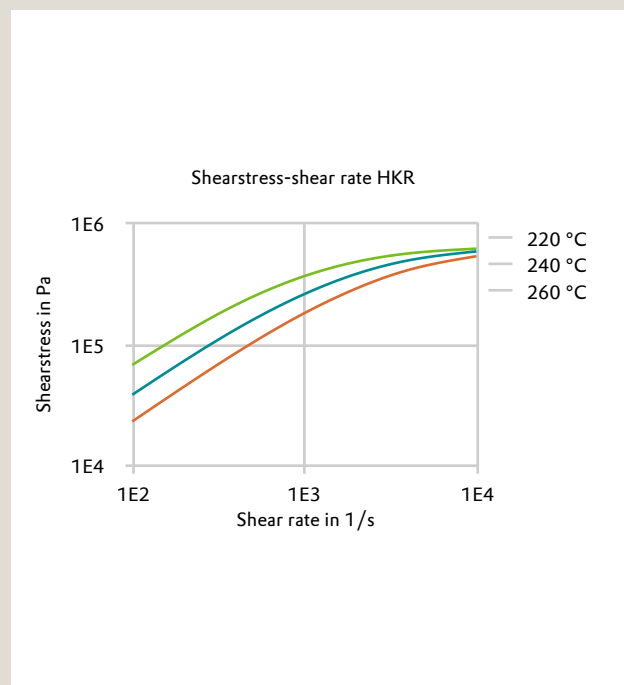


Stress-strain (isochronous) 23°C

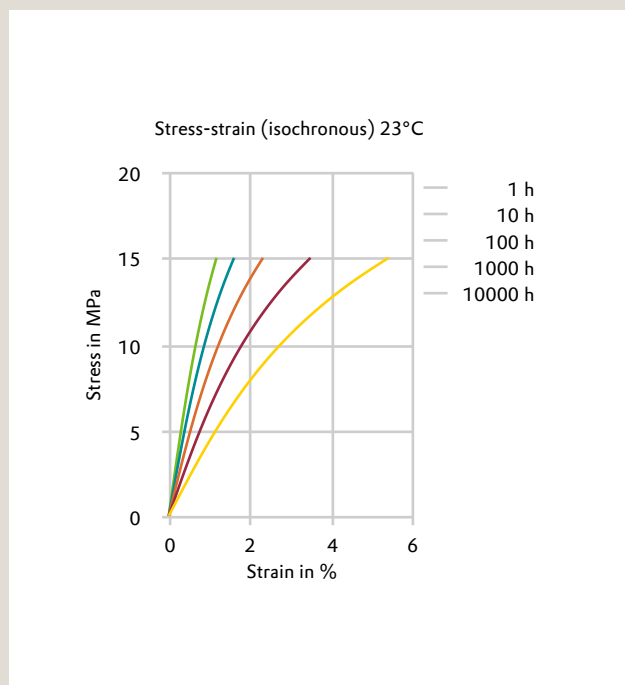


Creep modulus-time 23°C

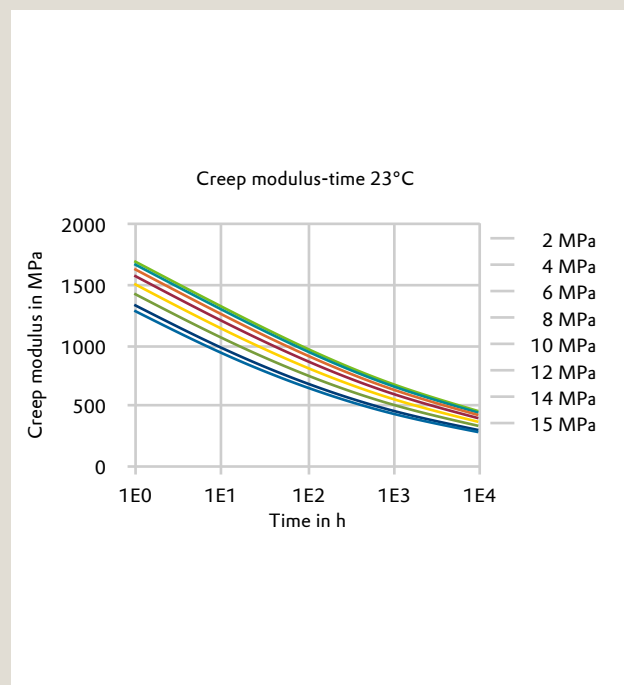


Stress-strain

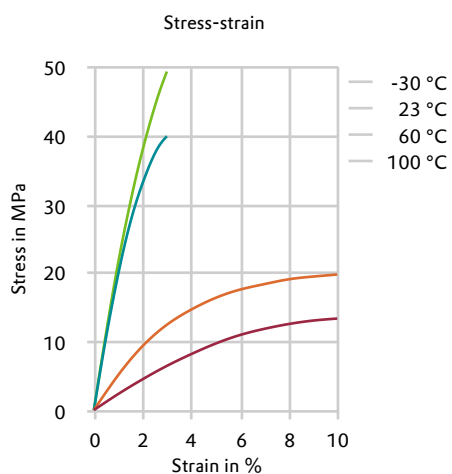

Secant modulus-strain

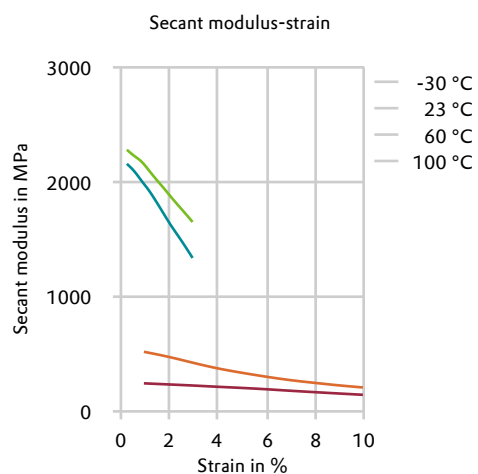

Dynamic Shear modulus-temperature

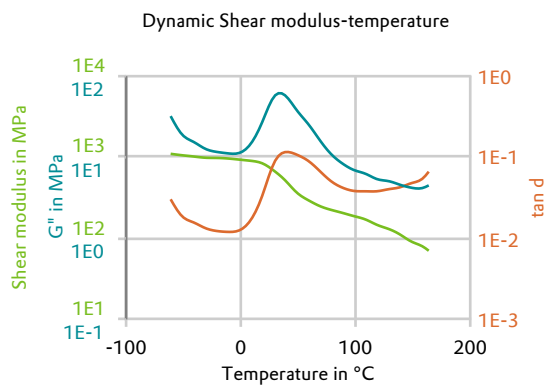

Characteristics

Applications

Encapsulation

Regulatory

US Pharmacopeia Class VI conformity

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ Insulating Oil (23°C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 (60°C)
- ✓ ISO 1817 Liquid 2 (60°C)

- ✓ ISO 1817 Liquid 3 (60°C)
- ✓ ISO 1817 Liquid 4 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel EN 590 (100°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (120°C)
- ✓ Water (23°C)

Rheological calculation properties

	dry	Unit	Test Standard
Density of melt	1090	kg/m ³	-
Thermal conductivity of melt	0.28	W/(m K)	-
Spec. heat capacity of melt	2400	J/(kg K)	-
Ejection temperature	180	°C	-
Min. mold temperature	30	°C	-
Max. mold temperature	100	°C	-
Min. melt temperature	230	°C	-
Max. melt temperature	270	°C	-

This information and all technical and other advice are based on Evonik's present knowledge and experience. However, Evonik assumes no liability for such information or advice, including the extent to which such information or advice may relate to third party intellectual property rights. Evonik reserves the right to make any changes to information or advice at any time, without prior or subsequent notice. Evonik disclaims all representations and warranties, whether express or implied, and shall have no liability for, merchantability of the product or its fitness for a particular purpose (even if Evonik is aware of such purpose), or otherwise. EVONIK SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. It is the customer's sole responsibility to arrange for inspection and testing of all products by qualified experts. Reference to trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used.

* is a registered trademark of Evonik Industries AG or one of its subsidiaries

Evonik Operations GmbH
Smart Materials
High Performance Polymers
 45772 Marl / Germany
 Tel: +49 2365 49-9878
evonik-hp@evonik.com
www.plastics-database.com